


TECHNICAL INFORMATION – SPECIFICATIONS

3020.012

3020.012 - Lavatory faucet complete with 2.5 GPM flow restrictor for 8”-12” spread installations. 10 5/8” wall spout with ceramic lever handles, 1/4 turn ceramic disk valves, and lift and turn drain. Ceramic lever handles are ADA compliant.

To Be Specified: **Finish Color**

Group I	Group II	Group III			Group IV	Group V
.96 Polished Chrome	.93 Polished Brass	.01 White	.91 Antique Brass	.87 Satin Copper	.99 Polished Nickel	.79 Satin Silver (certified)
	.77 Polished Chrome/ Polished Brass	.02 Bone	.92 Satin Brass	.89 Satin Nickel	.88 Polished Copper	.84 Polished Silver (certified)
		.06 Balsa	.95 Satin Chrome	.83 Polished Brass (Uncoated)	.86 Soft Pewter	.85 Satin Silver (certified)
		.13 Black	.97 Oil Rubbed Bronze		.90 Antique Copper	.94 Polished Gold (certified)
		.78 Antique Pewter	.98 Verdi			

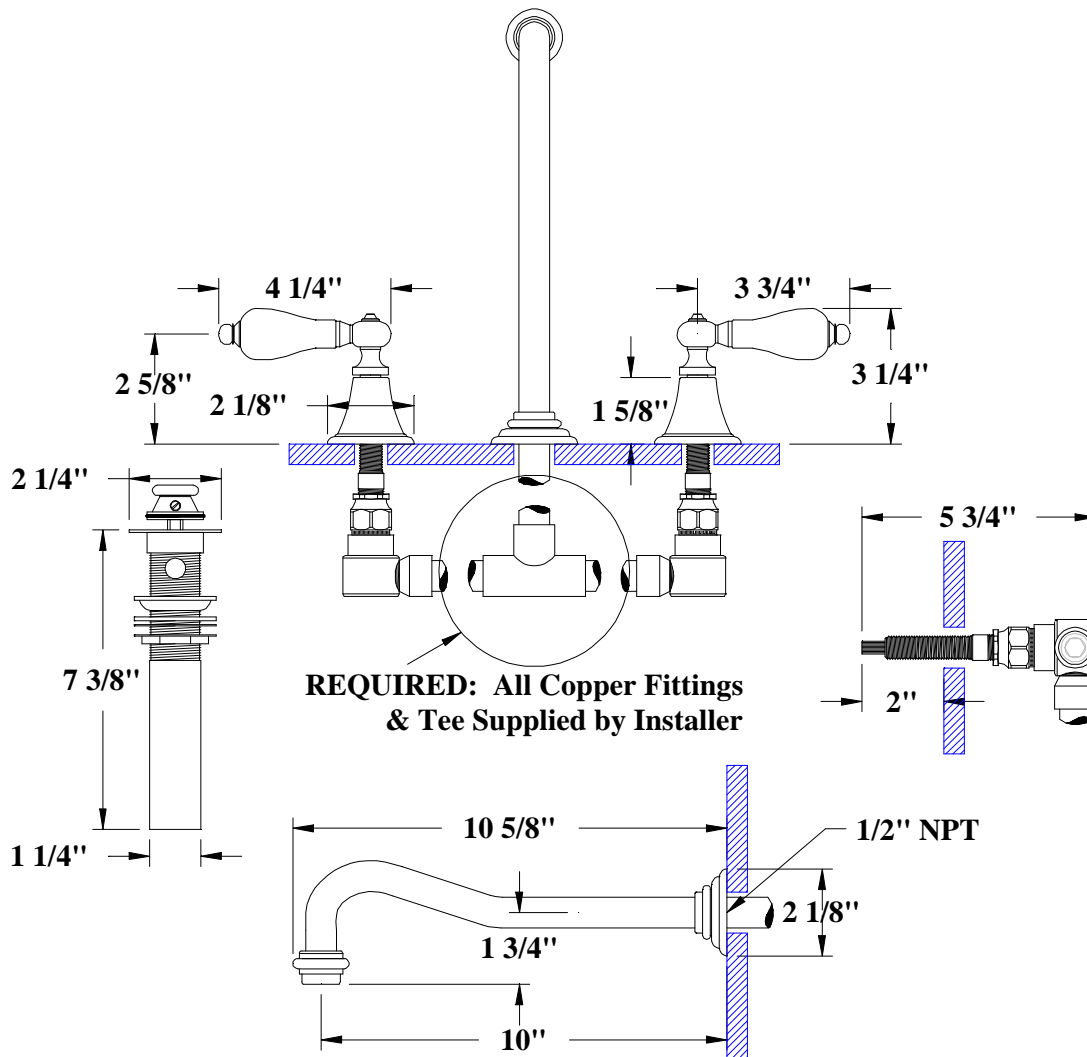

Fixture dimensions meet ANSI/ASME standards A112.19.2M, ANSI Z 124.1, ASTM E162, NFPA258, and CAN/CSA requirements. These measurements are subject to change or cancellation. No responsibility will be assumed for use of superseded or voided pages..