

CONSOLE BATHROOM SINK - 8 INCH FAUCET DRILLINGS - WHITE PORCELAIN- INSTALLATION

BEFORE YOU BEGIN

We recommend using a professional if you are not familiar with installing bathroom fixtures and plumbing. Vintage Tube & Bath accepts no liability for any damage to the floor, walls, plumbing, sink, countertop, or personal injury during installation.


Observe all State and local plumbing and building codes.

Unpack and inspect the sink for damage. If any damage is found, contact our Customer service team at


1-877-868-1369

Hanging the sink with mount. BRACKET SOLD SEPARATELY!


1. Before you begin you will need **Two People to hang the sink**, and you must reinforce the wall with a 2x4 or larger board between the studs of the wall.
2. To mount the sink, you will need to order our mount or install with 9/16thx2" bolts with 1-1/4" washers. Bolts and washers are not provided.

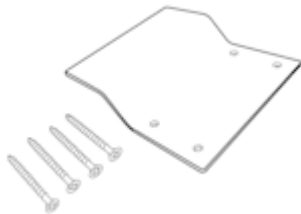

3. If you are using our mount, the measurement should be 24" from the floor to the bottom of the mount (as shown). Place the mount on the wall and mark the holes on the wall for the screws.

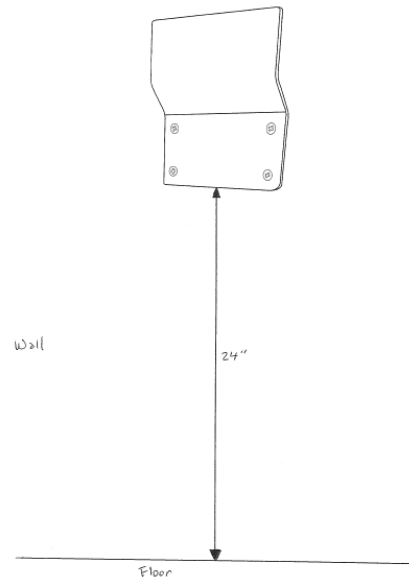


4. Secure the mount to the wall with the screws provided.
5. When you are ready to hang the sink, have one person hang the sink and the other person slide the legs under the sink at the same time.

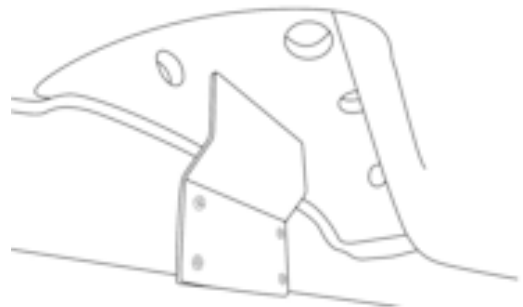

Hanging the sink with bolts

1. Before you begin you will need **Two People to hang the sink**, and you must reinforce the wall with a 2x4 or larger board between the studs of the wall.
2. To mount the sink, you will need to purchase two 9/16thx2" bolts with two 1-1/4" washers. Bolts and washers are not provided.
3. To mark the holes on the wall measure from the floor up the wall to the desired height. Mark the desired area based on the mounting holes on the sink.
4. Drill the holes on the marks with a 3/16th drill bit.
5. Have one person hold the sink aligning the holes on the back of the sink with the holes on the wall, while the other person dills in the screws until they are 1/4" from hitting the sink.
6. While one person is still holding the sink, the other person can slide the legs into place.
7. Once the legs are in place tighten the bolts till snug.

As Shown in the example below.

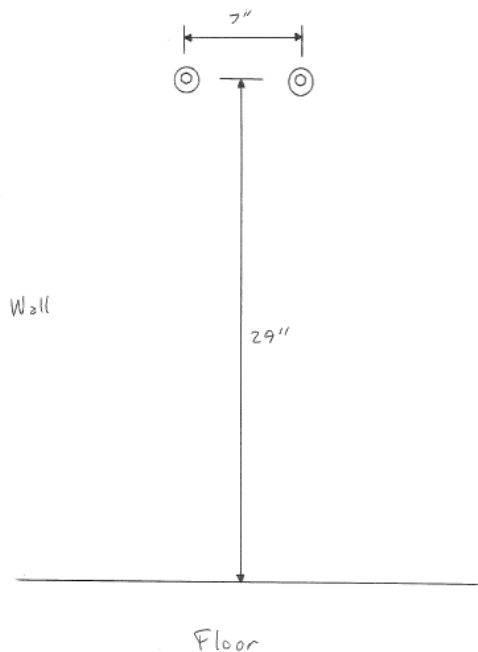

Cleaning and Maintenance

We recommend that you regularly clean your porcelain sink with a mild dish detergent cleaner. After each use, wipe the basin dry with a soft cloth. Do not allow mineral deposits such as iron, salt, lime, or soap to build up on your sink. Refrain from using acidic household cleaners, wipes with harsh chemicals, or abrasives, as these will damage porcelain.