

PORCELAIN VESSEL SINK INSTALLATION

BEFORE YOU BEGIN

We recommend using a professional if you are not familiar with installing bathroom fixtures and plumbing. Vintage Tube & Bath accepts no liability for any damage to the floor, walls, plumbing, vanity cabinet, sink, counter top, or personal injury during installation.

Observe all State and local plumbing and building codes.

Unpack and inspect the sink for damage. If any damage is found, contact our Customer service team at 1-877-868-1369

TOOLS AND MATERIALS:



Silicone Sealant
(100% Neutral
Cure)



Damp Cloth

GETTING STARTED


- Ensure that you have all the required materials that are needed for the installation process.
- For the following instructions, it is assumed that the vanity and countertop are already in place.

Installation

1. Carefully place your vessel sink upside down . Apply a generous amount of silicone sealant to the base of the sink where it will rest on the counter.




2. Turn the sink right-side-up and position over the drain hole. Set the sink in place and press firmly to secure.

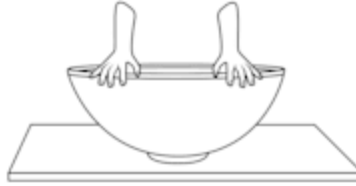

3. If desired, apply a bead of silicone sealant around the perimeter of the sink base for additional stability.



4. Remove excess sealant with a damp cloth to complete installation.

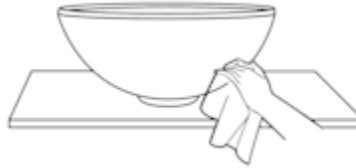

5. Proceed to the installation of the sink drain. Refer to the drain's installation instructions for guidance.

6. Allow the sealant to completely dry for 24 hours.



Cleaning and Maintenance

We recommend that you regularly clean your porcelain sink with a mild dish detergent cleaner. After each use, wipe the basin dry with a soft cloth. Do not allow mineral deposits such as iron, salt, lime, or soap to build up on your sink. Refrain from using acidic household cleaners, wipes with harsh chemicals, or abrasives, as these will damage porcelain.