


INSTALLATION INSTRUCTION RMNAB263



You may need the following tools to install the faucet:

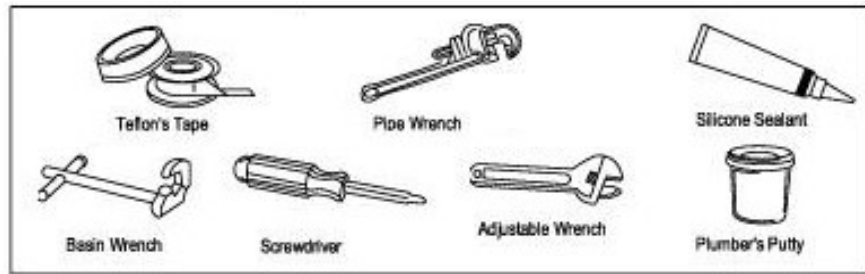

Parts:

Lock Nut x 2




Washer x 2



Warning!


- Do not over-tighten nut during the installation.
- Over-tighten may crack the valve and casue the leak.

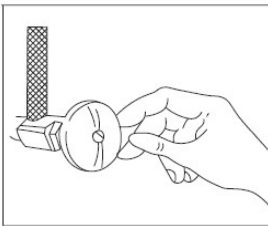


1. Shut off hot and cold water supply under sink.
Get a cloth to clean and to avoid getting small parts lost.
Remove old faucet if it has.



2. Insert the inlet shank through the sink hole.
Put the washers and the loack nuts on the inlet shanks.
Then tighten the nuts manually.

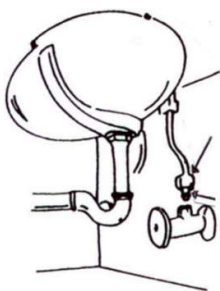

3. Connect water supply line.
Apply Teflon tape to threads on faucet shank and on shut off valves.

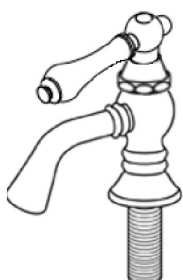

5. Switch on the faucet and let hot and cold water running.
Let water to run at least one minute to clean any debris.