

# Undermount Stainless Steel Sink Installation Guide

## General Recommendations:

Read installation and maintenance instructions thoroughly before installing sink.  
Be sure to use proper tools and always wear proper personal safety accessories for your protection.


## Tools and Material Needed for Installation:

--Tape Measure      --Pencil  
 --Putty Knife    --Scissors  
 --Adjustable Wrenches      --Drill and ½" (or larger) Drill Bits  
 --Silicone Adhesive/Sealant Rag      --Denatured Alcohol  
 --Ear Protection      --Eye Protection  
 --Gloves      --Hacksaw/Jigsaw  
 --Mounting Clips (Included)    --Cut-Out Template (Included)

*NOTE: Please carefully read complete instructions prior to installation. These installation instructions are for solid surface, composite material countertops. We recommend professional countertop installers. Customer is responsible for damage to the countertop and/or sink during installation.*

## Undermount Installation

- 1.) Unpack the new sink and check the contents of the carton: sink, mounting brackets and cut-out template (depending on model).
- 2.) Position cut-out sink template as desired and trace it on the countertop.
- 3.) Locate and drill the clearance hole inside the cut-out line.
- 4.) Cut the countertop opening by carefully following the line traced from the template according to the manufacturer's instruction.
- 5.) Drill faucet holes and install faucet according to manufacturer's installation instructions.
- 6.) Locate and drill the mounting holes (following countertop manufacturer's instructions) as shown below. Holes should allow even spacing of mounting bracket around the sink.

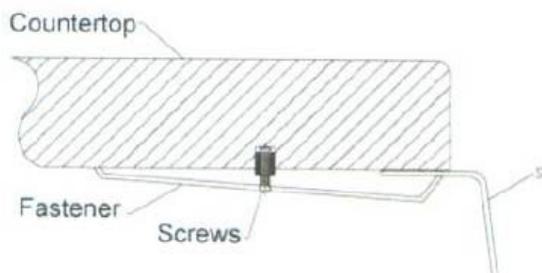

- 7.) Fasten mounting clips to countertop loosely.
- 8.) Clean underside of the countertop and around cut-out area making sure area is smooth and free of defects.
- 9.) Apply a bead of sealant to the rim of the sink near the inside edge. Be careful not to miss or skip any area.
- 10.) Carefully lift sink squarely under countertop cut-out. Press firmly on sink to form seal and seat sink. Immediately wipe excess sealant from edge of sink with a damp cloth. Be careful not to smear or spread sealant on countertop or sink.
- 11.) Turn all mounting brackets so they fit over the sink rim. Check alignment of sink in cut-out, adjust alignment as necessary. Tighten fasteners to secure sink.
- 12.) Connect water supply lines to the faucet and complete the faucet installation according to manufacturer's instructions. Connect drain assembly, hand tighten first to check alignment, then secure for watertight assembly.