


Whitehaus

WH202

Installation instructions for your new deluxe disposer flange, stopper and strainer unit.

1. Separate the top mounting ring from the lower mounting ring.
2. Loosen the three bolt mounting assembly until even with top of the mounting ring.
3. Use a regular screw driver to pry off the snap ring.
4. Apply some plumbers putty (make a nice round snake of putty by rolling it between your hands) to under the rim of your new disposer flange. *NOTE: Make sure plumber's putty does not come in contact with the surface of your New Deluxe Disposer Flange. It may mar the finish.*
5. Place flange into the drain and push firmly to make sure it sits evenly in the putty.
6. From working under the sink, slip the fiber gasket and the metal back up ring (flat side up) that came with your waste disposer up and over the sink flange. *NOTE: You may need someone to help hold down flange from the top side of sink while this gets connected.*
7. Hold the fiber gasket and metal back up ring in place with one hand and place the mounting ring with the three bolt assembly onto the flange sleeve. Then push the fiber gasket, metal back up ring and the mounting ring further up on the flange sleeve and slide the snap ring onto the flange sleeve until it pops into place in the groove on the sleeve.
8. Tighten the bolts on the three bolt mounting system until the whole mounting system is seated evenly and tightly against the sink.

Once the above has been completed you can go onto installing your Waste Disposer.

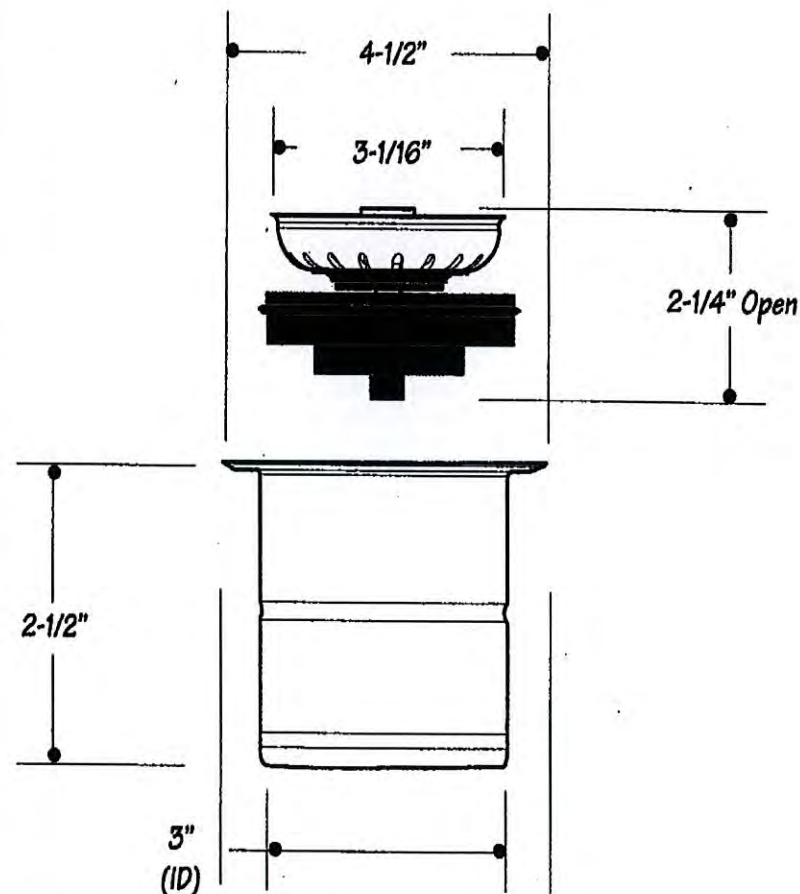

LIVE WITH STYLE!